


Connection of a scale model servo

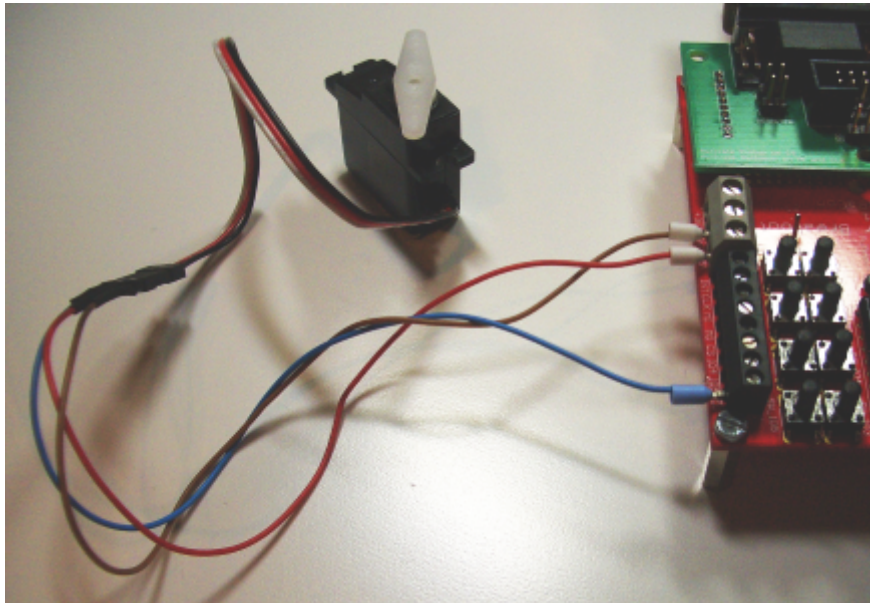

The pulse outputs IO3 and SPI_INT can be directly connected to conventional [scalemodelservos](#).

The pulse input of the servos is directly connected to IO3 or SPI_INT. Of course, mass is connected to mass. The voltage supply should be about 5 V liegen.

Such a servo motor requires a periodic signal at the pulse input with the periodic time 20 ms. At the beginning of a period the servo awaits a positive pulse. The pulse length defines the position of the servo arm. For the three positions **left**, **center** and **right**, the values 1 ms, 1,5 ms and 2 ms have proved of value, some models may deviate.

At the Netzer, the settings should be carried out as shown in the figure (IO configuration page).

IO3 (ID d)

Digitaler Eingang
 Ereignisse auf GPIO Server:

Digitaler Ausgang
 Startwert: 0 1

PWM Ausgang
 Frequenz *: Hz
 Logik: 0 1
 Startwert: 0x

Impulsausgang
 Modus *:
 Einheit *: ns
 Logik: 0 1
 Startwert: 0x

* Allgemeine Parameter für alle PWM Kanäle

The periodic time results from the internal 16-bit counter for continuous pulse signals: $65536 * 400 \text{ ns} = 26,21 \text{ ms}$.

Some servos can definitely cope with 13.1 ms (unit=200 ns), you should just try it. The advantage of using the smaller unit is that the servo may be addressed in smaller steps.

In the following please find a table with some example values. Due to the deviations in the periodic times, the values probably require slight adjustments.

Unit	Leftmost = 1 ms	Central position = 1,5 ms	Rightmost = 2,0 ms
400 ns	2375 (0x947)	3750 (0xea6)	5125 (0x1405)
200 ns	4750 (0x128e)	7500 (0x1d4c)	10250 (0x280a)

From:
<https://www.mobacon.de/dokuwiki/> - MoBaCon

Permanent link:
<https://www.mobacon.de/dokuwiki/doku.php?id=en:netzer:servo&rev=1323791668>

Last update: **2025/06/11 20:42**

